

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
P24,207 USA

Total Pages in this Submission

67

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

LASER APPARATUS AND METHOD FOR CONTROLLING THE SAME

and invented by:

Tsuyoshi TOKI

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having fifty-three (53) pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
P24,207 USA

Total Pages in this Submission
67

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets four (4) (Figures 1-5)
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
(Japanese Language)
- a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL592132542US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
P24,207 USA

Total Pages in this Submission
67

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal


CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	30	- 20 =	10	x \$18.00	\$180.00
Indep. Claims	7	- 3 =	4	x \$78.00	\$312.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) Assignment Recordation Fee					\$40.00
TOTAL FILING FEE					\$1,222.00

- ☒ A check in the amount of \$1,222.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-5425 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: July 7, 2000

CC:


Signature
Gary A. Hecht, Esquire (Reg. No. 36,826)
SYNNESTVEDT & LECHNER LLP
2600 Aramark Tower
1101 Market Street
Philadelphia, PA 19107-2950
Telephone: (215) 923-4466
Facsimile: (215) 923-2189
E-Mail: GHecht@synnlechn.com

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)

Applicant(s): Tsuyoshi TOKI

Docket No.

P24,207 USA

Serial No.
Not Yet AssignedFiling Date
HerewithExaminer
Nor Yet AssignedGroup Art Unit
Not Yet Assigned

Invention: LASER APPARATUS AND METHOD FOR CONTROLLING THE SAME

I hereby certify that this utility patent appln. transmittal (large entity) w/formal papers
(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231

on July 7, 2000
(Date)

Douglas M. Cook

(Typed or Printed Name of Person Mailing Correspondence)

Douglas M. Cook
(Signature of Person Mailing Correspondence)EL592132542US

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

LASER APPARATUS AND METHOD FOR CONTROLLING THE SAME

BACKGROUND OF THE INVENTION

5 The present invention relates to a laser apparatus,
which emits a laser beam, and a method for controlling the
same, and more particularly, to an exposure apparatus and an
exposure method used during a lithography process for
fabricating microdevices, such as semiconductor devices,
10 liquid crystal display devices, charge-coupled devices
(CCDs), and thin film magnetic heads.

15 An exposure apparatus is used when fabricating
semiconductor devices to transcribe a pattern formed on a
reticle (mask) to a wafer (substrate), to which a
photosensitive material such as photoresist is applied.
There is a demand for such exposure apparatus to have a
higher resolution to miniature circuit patterns. To satisfy
such demand, an excimer laser apparatus is used as a light
20 source to lengthen the short waves of the exposure light.

25 Such excimer laser apparatus performs an adjustment
pulse emission in which pulses of laser beam are emitted
cyclically or continuously without the operator's command
during a ready state, in which the irradiation of a reticle
or wafer by a laser beam is stopped. This maintains the gas
state (density distribution) in the laser chamber. Further,
control data to be needed for the emission of the laser
pulse after the ready state, such as the relationship
30 between the applied voltage and the output laser pulse
energy, is acquired during the adjustment pulse emission.

1
2
3
4
5 The conditions of the adjustment pulse emission during
the ready state, that is, the target energy of each pulse,
the applying voltage corresponding to the target energy, and
the oscillation frequency (emission period), are determined
by the excimer laser apparatus itself and substantially
maintained constant.

6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228

laser apparatus and a method for controlling the same that stably outputs the desired laser beam from the beginning of the laser beam emission even if the laser beam emission conditions change.

5

It is another object of the present invention to provide a laser apparatus and a method for controlling the same that accurately recognizes the laser beam emission state under various emission conditions during the ready state of the laser apparatus.

It is a further object of the present invention to provide an exposure apparatus and an exposure method that stably irradiates a substrate, such as a wafer, with the desired laser beam even if the laser beam emission condition changes during exposure.

To achieve the above objects, the present invention provides a laser apparatus. The laser apparatus includes a laser element that emits the laser beam, and a detector that detects the laser beam emitted from the laser element. A controller controls the laser element to emit the laser beam under a plurality of emission conditions in a ready state, and controls the detector to detect the laser beam emitted in the ready state.

Another aspect of the present invention provides an apparatus that exposes a substrate by illuminating a pattern formed on a mask with a laser beam and projecting an image of the pattern on the substrate. The apparatus includes a laser source including a laser element to emit a laser beam, an illumination unit disposed in a path of the laser beam,

that guides the laser beam emitted from the laser source to the mask, and a detector, at least part of the detector being disposed in the path of the laser beam, that detects the laser beam emitted from the laser source. A controller is functionally associated with the laser source and the detector and controls the laser source to emit the laser beam under a plurality of emission conditions in a ready state and controls the detector to detect the laser beam emitted from the laser element in the ready state.

A further aspect of the present invention provides a method that exposes a substrate by illuminating a pattern formed on a mask with a laser beam and projects an image of the pattern on the substrate. The method includes emitting the laser beam under a plurality of emission conditions during a ready state in which illumination of the mask with the laser beam is prevented, detecting the emitted laser beam in the ready state, and adjusting the emission of the laser beam to be illuminated on the mask based on the detection result.

A further aspect of the present invention provides a laser apparatus that emits a laser beam to an external device. The laser apparatus includes a laser element that emits the laser beam, and a laser controller that receives information from the external device and controls the emission of the laser beam from the laser element. The controller determines an emission condition of the laser beam during a ready state, in which the external device does not use the laser beam, based on the information.

A further aspect of the present invention provides an

exposure apparatus that exposes a substrate by irradiating the substrate with a laser beam. The exposure apparatus includes a laser apparatus including a laser element to emit the laser beam and a laser controller to control the emission of the laser beam, and a beam directing system disposed in a path of the laser beam that directs the laser beam emitted from the laser element to the substrate. An exposure controller connected to the laser controller, that provides the laser controller information for determining an emission condition of the laser beam during a ready state in which the laser beam emitted from the laser element is not guided outside of the laser apparatus.

Other aspects and advantages of the present invention will become apparent from the following description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, together with objects and advantages thereof, may best be understood by reference to the following description of the presently preferred embodiments together with the accompanying drawings in which:

Fig. 1 is a schematic diagram showing an exposure apparatus according to first to third embodiments of the present invention;

Fig. 2 is a schematic block diagram of an excimer laser source of Fig. 1;

Fig. 3 is a chart showing an oscillation pattern of the laser beam in a ready state;

Fig. 4 is a schematic diagram showing a step-and-scan

projection exposure apparatus according to a fourth embodiment of the present invention; and

Fig. 5 is a block diagram showing an exposure control system of the projection exposure apparatus of Fig. 4.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[First Embodiment]

An exposure apparatus for fabricating semiconductor devices according to a first embodiment of the present invention will now be described with reference to Figs. 1 to 3.

Fig. 1 is a schematic view showing an exposure apparatus 11 of the first embodiment. The exposure apparatus 11 is a step-and-scan scanning exposure apparatus that employs an excimer laser, or pulse light source, as an exposure light source.

The exposure apparatus 11 includes an illumination system 12, a reticle stage 13, which holds a reticle R illuminated by the illumination system 12 and moves in a predetermined scanning direction, a projection system 14 for projecting a pattern image, which is formed on the reticle R, to a wafer W, which serves as a substrate, a wafer stage 15, which holds the wafer W and changes the relative position between the wafer W and the projection system 14, and a controller for controlling each of these sections.

The illumination system 12 includes an excimer laser source 20, a beam shaping unit 21, a fly eye lens 22, a

diaphragm 23, a beam splitter 24, a first relay lens 25A, a second relay lens 25B, a fixed reticle blind 26A, a movable reticle blind 26B, a mirror 27, and a condenser lens 28.

5 An XeCl excimer laser source (oscillation wavelength, 308nm), a KrF excimer laser source (oscillation wavelength 248nm), an ArF excimer laser source (oscillation wavelength 193nm), or an F₂ excimer laser source (oscillation wavelength 157nm) may be used as the excimer laser source 20.

10 The beam shaping unit 21 comprises, for example, a cylinder lens or a beam expander, and shapes the cross-section of a laser beam LB emitted from the excimer laser source 20 so that the laser beam LB efficiently enters the fly eye lens 22. The fly eye lens 22 functions as an optical integrator that makes the intensity distribution of the laser beam LB emitted by the excimer laser source 20 uniform. The laser beam LB emitted from the fly eye lens 22 will hereafter be referred to as a pulse illumination light IL.

20 The diaphragm 23 is a disk-like member and arranged near an exit plane of the fly eye lens 22, which is substantially conjugated with a pupil plane of the projection system 14. In addition to, for example, a normal circular opening, a small circular opening for a small σ illumination, an opening for annular illumination, and an opening located at positions spaced from the optical axis of the pulse illumination light IL for oblique incidence illumination are formed at equal angular intervals.

30 The diaphragm 23 is rotated by a driver 32, such as a

motor controlled by a main control unit 31 (described later). This selectively arranges one of openings of the diaphragm 23 in the path of the pulse illumination light IL in accordance with the pattern on the reticle R, such as a cyclic pattern or an isolation pattern, and changes the illumination conditions. That is, the diaphragm 23 changes the intensity distribution of the pulse illumination light IL on the plane that is substantially conjugated with the pupil plane of the projection system 14 and alters the illumination conditions of the reticle R.

The beam splitter 24 has a high transmittance and a low reflectance to reflect some of the pulse illumination light IL that exits the fly eye lens 22, which serves as the optical integrator.

The fixed reticle blind 26A and the movable reticle blind 26B are provided between the first relay lens 25A and the second relay lens 25B. The fixed reticle blind 26A is arranged on a plane slightly defocused from a plane conjugate with the pattern surface of the reticle R and has a rectangular opening for regulating an illumination area Ra on the reticle R. The movable reticle blind 26B is arranged near the fixed reticle blind 26A and has an opening of which the position in the scanning direction and the width are variable.

The mirror 27 bends the optical path of the pulse illumination light IL that passes through the second relay lens 25B so that the illumination area Ra on the reticle R is illuminated by the pulse illumination light IL via the condenser lens 28.

The operation of the illumination system 12 will now be described. The laser beam LB emitted from the excimer laser source 20 enters the beam shaping unit 21. The beam shaping unit 21 shapes the cross-section of the laser beam LB so that the laser beam efficiently enters the downstream fly eye lens 22. The laser beam LB then enters the fly eye lens 22. This forms a large number of secondary light sources at the exit side of the fly eye lens 22. The pulse illumination light IL, exits the secondary light sources, passes through one of the openings in the diaphragm 23, and then reaches the beam splitter 24.

The pulse illumination light IL transmitted through the beam splitter 24 proceeds through the first relay lens 25A and passes through the rectangular opening of the fixed reticle blind 26A and the movable reticle blind 26B. The pulse illumination light IL passes through the second relay lens 25B. The optical path of the pulse illumination light IL is then bent vertically downward by the mirror 27. The pulse illumination light IL is transmitted through the condenser lens 28 and guided to the rectangular illumination area Ra to illuminate the reticle R held on the reticle stage 13.

The pulse illumination light IL reflected by the beam splitter 24 is received by an integrator sensor 34, which is formed by a photoelectric transfer device, via a condensing lens 33. The photoelectric transfer signal output by the integrator sensor 34 is provided via a peak hold circuit and an A/D converter (neither shown) to the main control unit 31 (described later) for each pulse as an irradiation energy signal ES.

The integrator sensor 34 may be, for example, a PIN photodiode having sensitivity outside the far ultraviolet band and a high response frequency for detecting the pulses from the excimer laser source 20. The correlation coefficient between the irradiation signal ES from the integrator sensor 34 and the energy (exposure amount) of the pulse illumination light IL on the surface of the wafer W is predetermined and stored in a memory 35 of the main control unit 31.

The reticle R is placed on a reticle stage 13 and adhered to the reticle stage 13 with a vacuum chuck or the like (not shown). A reticle stage driver 36 enables the reticle stage 13 to be scanned within a predetermined stroke along a horizontal plane (XY plane) in the scanning direction (in the Y axis direction, or the lateral direction of the plane of Fig. 1). The position of the reticle stage 13 during scanning is measured by a laser interferometer 38 via a mirror 37 provided on the reticle stage 13. The value measured by the laser interferometer 38 is supplied to the main control unit 31.

The projection system 14 comprises a plurality of coaxial lens elements extending in the Z axis direction along optical axis AX. The lens elements are optically arranged so that both sides of the projection system 14 are telecentric. The projection system 14 has a projection magnification α (α being, for example, 1/4 or 1/5). Thus, when the illumination area Ra on the reticle R is irradiated by the pulse illumination light IL as described above, the pattern of the reticle R is projected to a slit-like exposure area Wa on the wafer W, to which resist

(photosensitive material) is applied, as an image reduced by the projection system 14 in accordance with the projection magnification α . This exposes the wafer W within the exposure area Wa.

5

The wafer stage 15 includes an XY stage 40, which is driven by a wafer stage driver 39, and a Z tilt stage 41. The XY stage 40 is movable in two dimensions, the Y axis direction, which is the scanning direction (the horizontal direction as viewed in Fig. 1), and the X axis direction which is perpendicular to the scanning direction (the direction perpendicular to the plane of Fig. 1).

The Z tilt stage 41, which is installed on the XY stage 40, is movable in the Z axis direction (the vertical direction as viewed in Fig. 1) and inclinable relative to the optical axis AX of the projection system 14. A wafer holder (not shown) holds the wafer W on the Z tilt stage 41 by means of vacuum suction, or the like. The Z tilt stage 41 adjusts the position of the wafer W in the Z axis (focal position) and the inclination angle of the wafer W relative to the optical axis AX of the projection system 14. Further, a laser interferometer 43 detects the position of the wafer stage 15 with a mirror 42 provided to the Z tilt stage 41. The value measured by the laser interferometer 43 is supplied to the main control unit 31.

A sensor 44 is arranged on the Z tilt stage 41 and positioned along the optical axis AX of the projection system 14 by the movement of the XY stage 40. When the sensor 44 is arranged on the optical axis AX of the projection system 14, the sensor 44 detects the illuminance

distribution of the pulse illumination light IL that reaches the image surface of the projection system 14. The illuminance distribution of the pulse illumination light IL detected by the sensor 44 is input to the main control unit 31. The detection result of the sensor 44 and the detection result of the integrator sensor 34 are compared to obtain the illuminance distribution.

The main control unit 31 has a microcomputer (or minicomputer), which includes a central processing unit (CPU), a read only memory (ROM), and a random access memory (RAM). To ensure that the exposure operation is performed accurately, the main control unit 31 substantially exclusively controls, for example, synchronous scanning of the reticle R and the wafer W, the stepping and exposure timing of the wafer W, and the emission conditions (or emission conditions) of the excimer laser source 20 during scanning exposure.

More specifically, the main control unit 31, for example, during scanning exposure, controls the position and velocity of the reticle stage 13 and the XY stage 40 with the respective reticle stage driver 36 and the wafer stage driver 39 based on the detected values of the laser interferometers 38, 43.

Further, the main control unit 31 sets the irradiation timing and the irradiation power (the energy of the laser beam LB) of the excimer laser source 20 by providing control information CS to the excimer laser source 20.

The main control unit 31 also controls the diaphragm 23

with the driver 32 and controls the opening and closing of the movable reticle blind 26B in synchronism with stage-related operation information.

5 The internal structure of the excimer laser source 20 of the exposure apparatus 11 according to the present embodiment will now be described.

10 As shown in Fig. 2, the excimer laser source 20 includes a laser resonator 20a, a beam splitter 20b, a shutter 20c, an energy monitor 20d, a controller 20e, and a high voltage power supply 20f. A plurality of gases are sealed in the laser resonator 20a. A pair of electrodes (not shown) for emitting the laser beam LB and a fan 20g are provided in the laser resonator 20a. The high voltage power supply 20f applies a predetermined voltage to the pair of electrodes in the laser resonator 20a under the control of the controller 20e, which serves as a control means. This causes a discharge between the pair of electrodes and emits the laser beam LB.

15 The shutter 20c is opened and closed in accordance with the control information sent from the main control unit 31. That is, during the ready state, in which the irradiation of the reticle R with the laser beam LB is stopped, the shutter 20c is closed and the emission of the laser beam LB from the excimer laser source 20 to the beam shaping unit 21 is blocked. During the irradiation state, in which the reticle R is irradiated with the laser beam LB, the shutter 20c is opened and the laser beam LB is emitted from the excimer laser source 20 to the beam shaping unit 21.

Under the control of the controller 20e, the fan 20g is rotated to circulate the gas sealed in the laser resonator 20a. This stably provides excited gas between the electrodes even if pulse emission is performed continuously.

If pulse emission does not occur (voltage not being applied to the electrodes) for a long period of time, the controller 20e stops the rotation of the fan 20g. The shaft of the fan 20g extends through a chamber hermetically containing gases, which inhibits deterioration of the gases in the hermetic state caused by unnecessary rotation of the fan 20g.

The controller 20e controls the rotating speed of the fan 20g (the circulating speed of the gases in the laser resonator 20a) in accordance with the pulse emission cycle (oscillation frequency) of the laser beam LB of the laser resonator 20a. For example, if the interval between pulse emissions is relatively long, the rotating speed of the fan 20g is decreased since excited gases may be stably provided between the electrodes even if the circulating speed of the gases is slow. Further, if the pulse emission interval is relatively short, the rotating speed of the fan 20g is increased to increase the circulating speed of the gases. In this manner, the circulation of the gases in the laser resonator 20a is easily adjusted by changing the rotating speed of the fan 20g.

The controller 20e also changes the gas pressure in the laser resonator 20a. Data indicating the relationship between the gas pressure change in the laser resonator 20a and the characteristic (e.g., energy) of the laser beam LB

emitted from the laser resonator 20a may be stored
beforehand. The data may be used to adjust the gas pressure
in the laser resonator 20a during an irradiation state, such
as when the wafer W undergoes exposure, in order to change
the characteristic of the laser beam LB.

In Fig. 2, the laser beam LB, which is discharged in a
pulse-like manner from the laser resonator 20a, enters the
beam splitter 20b, which has a high transmittance and a low
reflectance. The laser beam LB transmitted through the beam
splitter 20b is emitted outside of the excimer laser source
20 when the shutter 20c is opened.

The laser beam LB reflected by the beam splitter 20b
enters the energy monitor 20d, which functions as a
detection means and is formed by a photoelectric transfer
device. The photoelectric transfer signal of the energy
monitor 20d is provided to the controller 20e as an emission
energy signal RS every pulse via a peak hold circuit (not
shown).

Just before entering the normal irradiation state, in
which the reticle R is irradiated with the laser beam LB,
the controller 20e sets the voltage supplied to the laser
resonator 20a from the high voltage power supply 20f so that
the energy of the laser beam LB corresponds to an energy per
pulse target value, which is included in the control
information CS.

The controller 20e also changes the oscillation
frequency (emission period) of the laser resonator 20a based
on the control information CS.

More specifically, in accordance with the control information CS from the main control unit 31, the controller 20e sets the oscillation frequency of the excimer laser source 20 to the frequency designated by the main control unit 31. Further, the controller 20e designates the voltage supplied by the high voltage power supply 20f so that the energy per pulse at the excimer laser source 20 becomes equal to a value designated by the main control unit 31.

Further, during an irradiation state in which the reticle R is irradiated with the laser beam LB to perform scanning exposure, some of the laser beam LB reflected by the beam splitter 24 enters the integrator sensor 34. Based on the information related to the irradiation energy of every pulse that is provided from the integrator sensor 34 via the main control unit 31, the controller 20e controls the voltage supplied to the laser resonator 20a from the high voltage power supply 20f for every pulse emission during the scanning exposure. During the scanning exposure, the energy monitor 20d in the excimer laser source 20 detects some of the laser beam LB via the beam splitter 20b and monitors changes in the performance of the laser resonator 20a.

During the ready state, the controller 20e causes the laser resonator 20a to emit the laser beam LB under a plurality of emission conditions with the shutter 20c in a closed state. The controller 20e then detects the emitted laser beam LB with the energy monitor 20d.

In this case, with reference to Fig. 3, the laser resonator 20a is controlled so that emission of the laser

beam LB, which has a predetermined number of pulses (e.g., several tens of pulses to several hundreds of pulses), and non-emission of the laser beam LB over a predetermined time period (e.g., several seconds to several hundreds of seconds) are alternately repeated. Further, during each of bursts A, B, C, in which a group of emissions are performed intermittently, laser oscillation is performed by, for example, as shown in Table 1 and Table 2, changing the set energy value (target energy) of the laser beam LB or the oscillation frequency (emission cycle) as the emission conditions.

Table 1

Burst	A	B	C	D	...	A	B	...
Set Energy Value (mJ)	5	6	7	8	...	5	6	...
Oscillation Frequency (kHz)	1	1	1	1	...	1	1	...

Table 2

Burst	A	B	C	D	...	A	B	...
Set Energy Value (mJ)	10	10	10	10	...	10	10	...
Oscillation Frequency (kHz)	0.8	0.9	1.0	1.1	...	0.8	0.9	...

The controller 20e obtains control data for outputting the laser beam LB for each emission based on the detection result of the energy monitor 20d. The control data

indicative of relationship between the set voltage (the voltage applied between the electrodes in the laser resonator 20a) and the target energy (the energy that is to be emitted from the laser resonator 20a) is obtained for each burst, or each emission condition. For each burst A, B, C, ..., the control data is obtained from when emission starts, at which the energy of the laser beam LB is unstable, to when predetermined n pulses (differs between laser sources, for example, 30 to 100 pulses) are emitted, and stored in a memory section of the controller 20e.

More specifically, if the energy of the first pulse of the laser beam LB detected by the energy monitor 20d in each burst is E1 when the laser resonator 20a is emitted at a certain set voltage V1, the set voltage V1 and the detected energy E1 are stored. The set voltage V1 and the detected energy E1 are compared with a set voltage Vset and a target energy Eset to obtain an energy difference d1. The set voltage V2 of the second pulse is determined based on the difference d1. This adjusts the voltage supplied to the laser resonator 20a from the high voltage power supply 20f.

Then, during emission of the second pulse, the actual set voltage V2 and the detected energy E2 are stored in the same manner as the first pulse. Further, the set voltage V2 and the detected energy E2 are compared with the target set voltage Vset and the target energy Eset to obtain an energy difference d2 and determine the set voltage V3 of the third pulse based on the difference d2. The same learning operation is repeated from the third pulse to the predetermined n pulse, and the actual set voltage Vn and detected energy En are accumulated.

In this manner, the relationship between the voltage (set voltage) applied between the electrodes in the laser resonator 20a and the energy of the laser beam LB detected by the energy monitor 20d are accumulated from the first pulse to the n pulse in each burst. The control data is formed for each emission condition based on the accumulated information.

During actual exposure when the reticle R is irradiated by the laser beam LB to expose the pattern of the reticle R on the wafer W, the controller 20e selects the control data appropriate for the emission condition during exposure from the control data stored for each emission condition.

Further, from the first pulse to the n pulse, the controller 20e controls the irradiation of the reticle R with the laser beam LB by adjusting the voltage supplied to the laser resonator 20a by the high voltage power supply 20f in accordance with the selected control data.

From the n+1 pulse, the voltage applied to the electrodes in the laser resonator 20a is adjusted based on the data of the relationship between the set voltage Vset and the target energy Eset and the energy of at least one pulse of the laser beam LB emitted before the n+1 pulse.

More specifically, if the set voltage Ve for actual exposure and energy Ee is designated from the control information CS of the main control unit 31, the set voltage V₁ is determined so that the emitted laser beam LB has energy Ee based on the set voltage V₁ and the energy E₁ of the ready state during emission of the first pulse. The

energy E_{e1} of the first pulse of the laser beam LB is detected by the integrator sensor 34.

Then, during emission of the second pulse, the set voltage V_{e2} is determined so that the emitted laser beam LB has the energy E_e based on the set voltage and energy E_2 of the ready state. From the third pulse to the predetermined n pulse, set voltages V_{e3} to V_{en} are determined so that the emitted laser beam LB has the energy E_e based on the set voltage V_3 to V_n and energies E_3 to E_n in the same manner as the second pulse, and the energy of the pulse emitted laser beam LB is sequentially detected by the integrator sensor 34.

Afterward, the target energy of the m pulse of the laser beam LB is determined from the energy E_{em-1} of the laser beam LB detected by the integrator sensor 34 during emission of the $m-1$ pulse, which is the pulse just before the m pulse. Based on the data of the relationship between the set voltage V_{set} and the target energy E_{set} , the set voltage V_m for emitting the determined m pulse having the target energy is determined. Subsequently, the set voltage is determined in accordance with a normal algorithm that repeats the same learning operation.

The set voltage V_m need not be determined based on the energy E_{em-1} of the laser beam LB of the $m-1$ pulse. That is, among the previously emitted N pulses (N being an integer of two or greater), the set voltage may be determined from the energy of at least one N pulses of the laser beam LB.

The set voltage V_{set} and the target energy E_{set} may be prepared for each of the plurality of emission conditions. Alternately, the set voltage V_{set} and the target energy E_{set} may be updated when necessary based on the relationship between the set voltage and the detected energy obtained during the learning operation or the exposure operation.

The first embodiment has the advantages described below.

(a) During the ready state, the exposure apparatus 11 oscillates the laser beam LB by changing the emission condition of the laser resonator 20a of the excimer laser source 20 for each burst, such as the set energy and the oscillation frequency of the laser beam LB. Further, the laser beam LB emitted by the laser resonator 20a is detected by the energy monitor 20d.

Thus, in the ready state, the energy amount of the laser beam LB actually emitted for each emission, and the emission state, such as the applied voltage, during emission may be accurately recognized. Accordingly, the exposure apparatus 11 may easily cope with various emission conditions in the irradiation state, in which the reticle R is irradiated with the laser beam LB.

(b) During the ready state, the exposure apparatus 11 obtains the control data for controlling the output of the laser beam LB for each emission condition based on the laser beam LB detection result of the energy monitor 20d and stores the control data in the memory section of the controller 20e.

Therefore, the control data required for the output control of the laser beam LB, such as the energy amount of the actually emitted laser beam LB and the applied voltage for each emission, may be obtained for each emission. Accordingly, accurate emission control is performed using the control data of each emission condition during the irradiation state.

(c) In the exposure apparatus 11, the pulse laser beam LB is emitted from the laser resonator 20a. Further, control data for controlling the output of each pulse of the laser beam LB from the beginning of the emission to the n pulse is obtained for each emission condition. That is, the control data for emission initiation, in which the energy of the laser beam LB tends to fluctuate, is obtained beforehand for each emission condition, and accurate emission control of the laser beam LB is performed.

(d) In the exposure apparatus 11, during the irradiation state, the voltage supplied to the laser resonator 20a is adjusted based on the control data obtained during the ready state. Therefore, the state of the mixed gases sealed in the laser resonator 20a is quickly shifted to a state in which the laser beam LB having the irradiation energy of the control information CS during the irradiation state is emitted. Accordingly, the irradiation condition of the laser beam LB during the irradiation state is readily stabilized.

(e) During the ready state, the energy or the oscillation frequency of the laser beam LB is changed to alter the emission condition for each burst. In this

manner, the learning operation is performed during the ready state, while altering the energy or oscillation frequency of the laser beam LB that are often changed as the irradiation condition of the reticle R. Accordingly, the emission state of the laser beam corresponding to the usage condition of the excimer laser source 20 is accurately recognized.

(f) During the ready state, the exposure apparatus 11 closes the shutter 20c in the excimer laser source 20 and prevents the laser beam LB emitted by the laser resonator 20a from being emitted from the excimer laser source 20. Therefore, during the ready state, the laser beam LB does not enter optical systems and sensors, such as the integrator sensor 34, downstream of the beam shaping unit 21. This inhibits changes in the optical systems and sensors.

[Second Embodiment]

A second embodiment according to the present invention will now be described. Description will center on parts differing from the first embodiment.

With reference to Figs. 1 and 2, in the second embodiment, the fixed reticle blind 26A and the movable reticle blind 26B are closed during the ready state. The shutter 20c in the excimer laser source 20 is left open. In this state, the same laser beam LB as the first embodiment is emitted from the laser resonator 20a of the excimer laser source 20. The oscillated laser beam LB is detected by the integrator sensor 34 via the beam shaping unit 21, the fly eye lens 22, the diaphragm 23, the beam splitter 24, and the condensing lens 33.

5 The energy of each pulse detected by the integrator sensor 34 is fed back to the controller 20e of the excimer laser source 20 through the main control unit 31. In the same manner as the first embodiment, the energy information of each pulse is stored in the memory section of the controller 20e together with the set voltage during emission of the pulses.

10 In addition to advantages (a) to (f) of the first embodiment, the second embodiment has the advantage described below.

15 (g) During the ready state, the exposure apparatus 11 detects the laser beam LB emitted by the laser resonator 20a of the excimer laser source 20 near the reticle R with the integrator sensor 34. Therefore, during the ready state, the affects of the beam shaping unit 21, the fly eye lens 22, and the diaphragm 23 are taken into consideration when the emission state of the laser beam LB is recognized. Accordingly, the emission of the laser beam LB during the irradiation state is controlled with further accuracy.

[Third Embodiment]

25 A third embodiment according to the present invention will now be described. Description will center on parts differing from the second embodiment.

30 In the third embodiment, the sensor 44 arranged on the Z tilt stage functions as a detection means. During the ready state, the sensor 44 is located on the optical axis AX of the projection system 14. In this state, the laser beam LB emitted by the laser resonator 20a is detected by the

5 sensor 44 via all of the optical devices included between the excimer laser source 20 and the image plane of the projection system 14, that is, the beam shaping unit 21, the fly eye lens 22, the diaphragm 23, the beam splitter 24, the relay lens 25A, 25B, the mirror 27, the condenser lens 28, and the projection system 14.

10 The energy of each pulse detected by the sensor 44 is fed back to the controller 20e by the main control unit 31. The energy information of each pulse is stored in the memory section of the controller 20e together with the set voltage during emission of the pulses.

15 In addition to advantages (a) to (f) of the first embodiment, the third embodiment has the advantage described below.

20 (h) In the ready state, the exposure apparatus 11 detects the laser beam LB emitted by the laser resonator 20a with the sensor 44 at a position located very closely to the position of the wafer W. Therefore, in the ready state, the oscillation state of the laser beam LB is recognized in substantially the same state as when the pattern of the reticle is transcribed and exposed. Accordingly, the
25 emission of the laser beam LB is controlled with further accuracy during the irradiation state.

[Modified Examples]

30 In each of the above embodiments, during the ready state, the energy of the laser beam LB or the oscillation frequency is changed. However, both energy and oscillation frequency may be changed to alter the emission condition of

the laser beam LB. This enables finer response to the emission conditions of the laser beam LB required in the irradiation state and more accurate emission control of the laser beam LB.

5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000

The rotating speed of the fan 20g (the gas circulating velocity in the laser resonator 20a) may be changed for each burst. Further, the pressure of the gases in the laser resonator 20a may be varied. This quickly shifts the state of the mixed gases sealed in the laser resonator 20a to a state in which the laser beam LB having the irradiation energy of the control information CS during the irradiation state is emitted. Accordingly, the irradiation conditions of the laser beam LB during the irradiation state is quickly stabilized. Further, the learning operation is performed in the ready state while varying the circulating speed or pressure of the gases in the laser resonator 20, which are variable reticle R illumination conditions. Accordingly, the oscillation state of the laser beam LB corresponding to the usage condition of the excimer laser source is accurately recognized.

It is only necessary that when a plurality of control parameters of the pulse emission of the laser beam LB is prepared, at least one of the control parameters (set energy, oscillation frequency, gas circulating speed, gas pressure, etc.) be varied for each burst to obtain the control data optimal for the emission condition required during the irradiation state.

In each of the above embodiments, the set voltage V_{en} up to the n pulse in the irradiation state is determined

based on the set voltage and the energy E_n of that pulse in the ready state. Alternatively, the second pulse set voltages V_{e2} to the n th pulse set voltage V_{en} may be determined based on the relationship between the energies E_{e1} to E_{en-1} of the first to $n-1$ pulses, which are the pulses immediately before the respective second to n pulses, and from the relationship between the set voltage V_n and the detected energy E_n of the subject pulse obtained during the ready state.

In the third embodiment, the laser beam LB is detected by the sensor 44 arranged on the Z tilt stage 41. Alternatively, the laser beam LB may be detected by an irradiation amount monitor (not shown) arranged on the Z tilt stage 41.

In each of the above embodiments, a pulse light is used as the laser beam LB. However, a continuous gas laser beam of, for example, He-Ne or carbonic acid gas may be used.

In each of the above embodiments, the present invention is applied to a scan type exposure apparatus for fabricating semiconductors. However, the present invention may also be applied to, for example, a liquid crystal display device, an imaging device, a microdevice, such as a thin film magnetic head, and a mask, such as a reticle or a photomask. Further, the present invention may be applied to an exposure apparatus that transcribes and exposes a non-magnified or magnified pattern of a mask, such as the reticle R or a photomask onto a substrate (e.g., the wafer W or the glass plate). Further, the present invention may be applied to a static exposure apparatus, which transcribes and exposes the

pattern of the reticle R on the wafer W using the step-and-repeat process.

5 In each of the above embodiments, the present invention is applied to the excimer laser source 20 of the exposure apparatus. However, the present invention may also be applied to, for example, a laser cutting machine, a laser measuring device, and a laser information reading device.

10 In the above embodiments, the emission conditions of the laser beam during the ready state of the laser apparatus are easily changed.

15 In the above embodiments, the control data for controlling the laser beam output for each emission condition is obtained from the detection result of the laser beam during the ready state.

20 In the above embodiments, the control data for controlling the laser beam output for each emission condition is obtained with further accuracy, especially during the initiation of emission, when the emission condition has a tendency to change.

25 In the above embodiments, the voltage supplied to the resonator is adjusted based on the control data obtained during the ready state of the laser apparatus. This shifts the state of the gas in the resonator to a state in which the required irradiation amount can be readily obtained.

30 In the above embodiments, the emission condition is varied during the ready state by changing at least one of

either the energy of the laser beam and the oscillation frequency. This recognizes the emission condition corresponding to the usage condition of the laser apparatus.

5 In the above embodiments, the gas circulating speed in the resonator is adjusted during the actual laser beam irradiation state in accordance with the control data obtained in the ready state. This shifts the gases in the resonator to a state in which the required irradiation
10 amount is readily emitted.

In the above embodiments, the circulation of the gases in the resonator is easily adjusted by changing the rotating speed of the fan in the resonator.

In the above embodiments, when an irradiation subject is actually irradiated with the laser beam, the speed of the fan and the state of the gases in the resonator is quickly shifted to a state in which the required energy amount is obtained based on the control data of the ready state.
20

A fourth embodiment according to the present invention will now be described with reference to the drawings. In this embodiment, the present invention is applied to a step-
25 and-scan projection exposure apparatus, which uses an excimer laser beam apparatus as a pulse energy source.

The projection exposure apparatus of this embodiment is shown in Fig. 4. As shown in Fig. 4, a laser beam LB pulse-
30 emitted from an excimer laser source 101 has a cross-sectional shape formed by a beam shaping unit 102, which includes a cylinder lens and a beam expander, so that the

laser beam LB efficiently enters a downstream fly eye lens 105. An excimer laser source 101 is preferably KrF (wavelength 248nm) or ArF (wavelength 193nm) excimer laser source.

The present invention may also be applied when an F₂ (wavelength, 157nm) laser source, a metal vapor laser source, or a pulse light source of a YAG laser high frequency generator is employed as the pulse light source.

The laser beam LB emitted from the beam shaping unit 102 enters an energy rough attenuator 103, which functions as an energy adjustor. The energy rough attenuator 103 is formed by arranging a plurality of ND filters, each having a different transmittance (1 - extinction rate), on a rotatable revolver. The rotation of the revolver shifts the transmittance of the entering laser beam between a plurality of levels starting from 100%.

The laser beam LB emitted from the energy rough attenuator 103 enters the fly eye lens 105 via a mirror M, which bends the optical path. The fly eye lens 105 forms a plurality of secondary light sources for irradiating a reticle (described later) with uniform illuminance distribution. The fly eye lens 105 has an exit plane at which an illumination system diaphragm (the so-called σ diaphragm) 106 is arranged. The laser beam emitted from the secondary light source in the diaphragm 106 (hereafter referred to as a pulse illumination light IL) enters a beam splitter 107, which has a low reflectance and a high transmittance. The pulse illumination light IL, which functions as an exposure beam, transmitted through the beam

splitter 107 passes through a rectangular opening of a fixed diaphragm (fixed reticle blind) 109A via a first relay lens 108A. The fixed diaphragm 109A is arranged in the vicinity of a plane conjugated with a pattern plane of the reticle. A movable diaphragm 109B is arranged near the fixed diaphragm 109B and has an opening of which the position in the scanning direction and the width are variable. The movable diaphragm 109B has blades arranged in the scanning direction to further restrict the illumination area during initiation and termination of scanning exposure and prevent unnecessary exposure.

The pulse illumination light IL that passes through the fixed diaphragm 109A and the movable diaphragm 109B is further transmitted through a second relay lens 108B and a condenser lens 110 and irradiates a rectangular illumination area 112R on the reticle 111, which is held on a reticle state 115, with uniform illuminance distribution. An image, which is obtained by reducing the pattern of the illumination area 112R on the reticle 111 by a projection magnification α (α being, for example 1/4 or 1/5) with a projector 113, is projected to a rectangular exposure area (illumination field) 112W defined on a wafer 114, on which a photoresist is applied. The wafer 114 is exposed within the exposure area 112W. The wafer 114 is, for example, a silicon or silicon on insulator (SOI) wafer.

In the following description, Z axis will be referred to as an axis parallel to an optical axis AX of the projector 113, and Y axis will be referred to as an axis parallel to a plane perpendicular to the optical axis AX and the scanning direction of the illumination area 112R on the

reticle 111. The axis parallel to a non-scanning direction, which is perpendicular to the scanning direction, is referred to as the X axis.

5 The reticle stage 115 is driven in the Y axis direction by a reticle stage driver 118. An X axis coordinate, a Y axis coordinate, and a rotational angle of the reticle stage 115 are detected by a mirror provided on the reticle stage 115 and a laser interferometer 116 and provided to the stage controller 117. The stage controller 117 controls the position and velocity of the reticle stage 115 with the stage driver 118 in accordance with the coordinates and angle.

10 The wafer 114 is held on a Z tilt stage 119 by a wafer holder (not shown), and the Z tilt stage 119 is arranged on an XY stage 120. The XY stage 120 positions the wafer 114 in the X axis and Y axis directions 114 and moves (scans) the wafer 114 in the Y axis direction at a constant velocity. The Z tilt stage 119 functions to adjust the position of the wafer 114 in the Z axis (focal position) and the inclination angle of the wafer 114 relative to the XY plane. An X axis coordinate, a Y axis coordinate, and a rotational angle of the XY stage 120 are detected by a mirror provided to the Z tilt stage 119 and a laser interferometer 122 and provided to the stage controller 120. The stage controller 117 controls the position and velocity of the XY stage 120 with a wafer stage driver 123 in accordance with the coordinates and angle.

25 The operation of the stage controller 117 is controlled by a main control system (not shown), which controls the

entire apparatus. When scan exposure is performed, the wafer 114 is scanned in the -Y direction (or the +Y direction) at a velocity $\alpha \cdot V_r$ (α being the magnification of the reticle 111 relative to the wafer 114) by means of the XY stage in synchronism with the illumination area 112R of the reticle 111 scanned in the +Y direction (or the -Y direction) at a velocity V_r by means of the reticle stage 115.

A sensor 121, which is preferably a photoelectric transfer device, is arranged near the wafer 114 on the Z tilt stage 119. The sensor 121 has a light receiving surface which is flush with the surface of the wafer 114. A PIN photodiode having sensitivity outside the far ultraviolet band and a high response frequency for detecting the pulse irradiation may be used. The detection signal of the sensor 121 is provided to an exposure controller 126 via a peak hold circuit and an analog/digital (A/D) converter.

The pulse illumination light IL reflected by the beam splitter 107 is received by an integrator sensor 125, which is preferably a photoelectric transfer device that functions as an energy sensor, via a condenser lens 124. The photoelectric transfer signal of the integrator sensor 125 is provided to the exposure controller 126 as an output DS (digit) via a peak hold circuit and an A/D converter (neither shown).

The correlation coefficient between the output DS of the integrator sensor 125 and the pulse energy (exposure amount) per unit area of the pulse illumination light IL on the surface of the wafer 114 (image plane) is predetermined

and stored in the exposure controller 126.

5 The exposure controller 126 provides control information TS to the excimer laser source 101 via a serial interface or a parallel interface in accordance with stage operation information from the stage controller 117 to control the emission timing (oscillation frequency) and emission power (energy) of the excimer laser source 101. Further, the exposure controller 126 controls transmittance by switching the ND filter of the energy rough attenuator 103. The stage controller 117 controls the opening and closing of the movable diaphragm 109B in accordance with the stage information.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145
10150
10155
10160
10165
10170
10175
10180
10185
10190
10195
10200
10205
10210
10215
10220
10225
10230
10235
10240
10245
10250
10255
10260
10265
1

supply voltage of a high voltage power supply 101e is set based on the control information TS. This sets the pulse energy of the laser beam LB emitted from the laser resonator 101a in the proximity of a predetermined value.

5 The average energy per pulse value of the excimer laser source 101 is normally stabilized at a predetermined energy E_0 (rated output) and controlled to be within a predetermined variable range about the energy E_0 (e.g., approximately +/- 10%). In the fourth embodiment, the pulse energy is finely modulated within the variable range. A shutter 101f for blocking the beam path of the laser beam LB in accordance with the control information TS from the exposure controller 126 is arranged at the outer side of the beam splitter 101b in the excimer laser source 101.

10
15
20 Further, a fan (not shown) circulates the gases in the laser resonator 101a. The controller 101d adjusts the rotating speed of the fan in accordance with the pulse emission period (oscillation frequency) of the laser beam LB emitted by the laser resonator 101a.

25 A temperature sensor and a pressure sensor (neither shown) are also provided in the laser resonator 101a. The controller 101d adjusts the temperature and gas pressure of the laser resonator 101a in accordance with the detection results of the temperature and pressure sensors.

30 The laser control operation and exposure operation of the present embodiment will now be discussed. The laser control operation performed during exposure is described in detail in Japanese Unexamined Patent Publication No. 2000-

21717.

Before processing a lot including a plurality of wafers, an operator determines a target exposure amount S_0 , which is the target value of the cumulative exposure amount of each point on the wafer 114. The operator also determines a minimum exposure pulse number N_{min} of the pulse illumination light IL that must be irradiated at each point of the wafer 114 with predetermined exposure amount control reproduction accuracy.

Based on these parameters, the exposure controller 126 maximizes the transmittance of the energy rough attenuator 103 and causes the excimer laser source 101 to perform the predetermined number of pulse irradiation at, for example, the vicinity of the median energy E_0 . The integrator sensor 125 detects the pulses emitted from the excimer laser source 101 to obtain the average pulse energy P of the pulses incident on the wafer 114. The exposure controller 126 then obtains the exposure pulse number N (the number of pulses that should be irradiated at each point on the wafer 114 during exposure) by dividing the target value S_0 of the cumulative exposure amount with the detected average pulse energy P . Since the division S_0/P result is not necessarily an integer, the division S_0/P is rounded up as will be described later. For simplicity, the division S_0/P result will be described as an integer here.

If the obtained exposure pulse number N is already equal to or greater than N_{min} , exposure is initiated. However, if the obtained exposure pulse number N is less than N_{min} , the exposure controller 126 selects and sets the

ND filter of the energy rough attenuator 103 that has, for example, the highest transmittance that enables the exposure pulse number N to be equal to or greater than Nmin. When the selected transmittance is represented by T_{ND} , the exposure number N is represented by $(S_0/(P \cdot T_{ND}))$. Actually, $(S_0/(P \cdot T_{ND}))$ is not necessarily an integer and must thus be rounded up. For the sake of brevity, however, $(S_0/(P \cdot T_{ND}))$ will be described as an integer. As a result, the target energy per pulse Et is S_0/N . The exposure controller 126 supplies the target energy Et to the controller 101d of the excimer laser source 101. The controller 101d sets the voltage applied by the high voltage power supply 101e to set the target energy of the laser beam LB for the next pulse emission.

With reference to Fig. 4, when the width of the slit-like exposure area 112W on the wafer 114 (slit width) is represented by D_w , the oscillation frequency of the excimer laser source 101 as F_w , and the scanning velocity of the wafer 114 during scanning exposure as V_w , the wafer 114 moves by a distance of V_w/F_w between pulse irradiations. Thus, the exposure pulse number N may be expressed by equation (1), which is shown below. That is, the slit width D_w and the oscillation frequency F_w must be reset to obtain the exposure pulse number N.

$$N = D_w / (V_w / F_w) \quad \dots (1)$$

Since the slit width D_w is normally constant, at least either one of the oscillation frequency F_w and the scanning velocity V_w are set to satisfy equation (1). The information of the scanning velocity V_w is provided to the stage

controller 117, and the information of the oscillation frequency F_w is provided to the controller 101d of the excimer laser source 101.

5 Afterward, when performing scanning exposure on the first wafer W, the exposure controller 126 sends an exposure preparation command to the controller 101d and then provides the controller 101d with a trigger signal for irradiation at frequency F_w . In accordance with the trigger signal from the exposure controller 126, the laser resonator 101a of the excimer laser source 101 emits a laser beam LB. Further, the exposure controller 126 feeds back the output DS of the integrator sensor 125 directly to the controller 101d of the excimer laser source 101 for each pulse. Based on the output DS of the integrator sensor 125, the controller 101d adjusts the voltage supplied to laser resonator 101a for the subsequent pulse emission. For example, the controller 101d controls the voltage of the high voltage power supply 101e for the next pulse emission using the prepared control data based on the output DS of the integrator sensor 125 so that the average pulse energy value of the laser beam emitted by the laser resonator 101a becomes equal to the target energy E_t (S_0/N) before the emitted pulse number reaches N. After the emitted pulse number reaches N, the controller 101d sequentially controls the voltage of the high voltage power supply 101e for the next pulse emission based on the cumulative exposure amount of the series of previous N pulses (movable window). This provides a cumulative exposure amount that achieves the target value S_0 with the necessary exposure amount control accuracy at each point on the wafer after the scanning exposure.

During this scanning exposure period, the controller 101d detects the output ES of the energy monitor 101c, confirms whether the detection result is included within a tolerable range of the target energy Et, and checks whether there is an abnormality in the excimer laser source 101.

After exposure of the first wafer 114 is completed, the exposure controller 126 outputs a ready command (burst-off signal) to the controller 101d of the excimer laser source 101. Upon receipt of the ready command, the controller 101d of the excimer laser source 101 closes the shutter 101f and performs adjustment pulse emission in which the resonator 101a emits pulses of laser beam at constant intervals or in a substantially continuous manner to maintain the gas state in the laser resonator 101a or obtain the control data (the relationship between the energy of the laser beam output from the laser resonator and the applied voltage) used for the next pulse emission state in which the laser beam LB is to be emitted outside of the excimer laser source 101.

The excimer laser source 101 is not required to enter the ready state to perform the adjustment pulse emission each time the exposure of a wafer is completed. The adjustment pulse emission may be performed after completing the exposure process on a number of wafers.

The conditions of the adjustment pulse emission are set taking into consideration the conditions for the next actual pulse emission performed when the shutter 101f is opened (when the laser beam from the excimer laser source 101 is used on the exposure apparatus, that is, during detection of alignment, during detection of the imaging characteristic of

the projection system, etc.).

Accordingly, the exposure controller 126 provides the next actual pulse emission condition as the control information TS with the controller 101d of the excimer laser source 101 together with the ready command to determine the conditions of the adjustment pulse emission.

In this embodiment, the next actual pulse emission is performed during exposure of the second wafer. Since the exposure condition of the second wafer is the same as that of the first wafer, the exposure controller 126 provides the previously set target energy E_t and oscillation frequency F_w with the controller 101d of the excimer laser source 101 as information for determining the adjustment pulse emission condition.

Further, in the fourth embodiment, the controller 101d of the excimer laser source 101 performs the adjustment pulse emission under the same conditions as that of the next actual pulse emission. That is, the controller 101d sets the target energy E_t and the oscillation frequency F_w as the condition of the adjustment pulse emission.

The controller 101d of the excimer laser source 101 optimizes the rotating speed of the fan in the laser resonator 101a, the temperature of the laser resonator 101a, the gas pressure of the laser resonator 101a, and the pause interval (the pause time of the adjustment pulse emission in the ready state) in the adjustment pulse emission in accordance with the adjustment pulse emission conditions (the target energy E_t and the oscillation frequency F_w).

When the controller 101d of the excimer laser source 101 completes preparation of the adjustment pulse emission, the high voltage power supply 101e supplies the laser resonator 101a with voltage corresponding to the target energy E_t , and the laser resonator 101a emits a laser beam LB in accordance with the frequency F_w trigger signal generated in the controller 101d. Part of the laser beam LB emitted from the laser resonator 101a is reflected by the beam splitter 101b toward the energy monitor 101c. The energy monitor 101c provides the obtained energy information as the output ES to the controller 101d. The controller 101d determines the control data for the next actual pulse emission based on the adjustment pulse emission condition and the information ES. In addition to the control information of the voltage corresponding to the target energy E_t , the control data for the next actual pulse emission includes the rotating speed of the fan in the laser resonator 101a, the temperature of the laser resonator 101a, and the gas pressure of the laser resonator 101a.

When preparation for the exposure of the second wafer is completed, the exposure controller 126 sends an exposure preparation command to the controller 101d of the excimer laser source 101. The controller 101d then uses the control data determined during the previous ready state and begins the exposure of the second wafer.

In this manner, the adjustment pulse emission condition for the ready state of the excimer laser source 101 is set with the next actual pulse emission taken into consideration. Further, the control data determined during the adjustment pulse emission is used for the next actual

pulse emission. Thus, during the next actual pulse emission, a laser beam having the desired energy is stably output from the beginning, and the cumulative exposure amount of the wafer 114 is uniformed with the desired accuracy.

[Modified Embodiment]

In the fourth embodiment, the controller 101d sets the same condition of the adjustment pulse emission as that of the next actual pulse emission. However, the two conditions need not be the same as long as the condition of the adjustment pulse emission is optimized in accordance with the condition of the next actual pulse emission.

[Modified Embodiment]

In the fourth embodiment, the target energy and the oscillation frequency are provided to the controller 101d of the excimer laser source 101 by the exposure controller 126 as the condition of the next actual pulse emission to determine the adjustment pulse emission of the excimer laser source 101. However, instead of both parameters, only one of these parameters may be provided to the controller 101d. Other parameters may also be provided to the controller 101d.

For example, at least one of the target energy, the oscillation frequency, the pause interval during the actual pulse emission, the exposure pulse number N, and the voltage value immediately after initiation of the pulse emission may be provided to the controller 101d of the excimer laser source 101 as the condition for the next actual pulse

emission.

5 The condition of the next actual pulse emission does not necessarily have to be provided before initiating the ready state of the excimer laser source 101. For example, if the condition of the next actual pulse emission is substantially the same as that of the previous actual pulse emission, the condition of the adjustment pulse emission may be set in accordance with the conditions et for the previous actual pulse emission. Further, before processing a lot of wafers, the condition of the adjustment pulse emission which is performed during the processing the lot may be set in accordance with the actual pulse emission conditions et for the exposure of the first wafer of the lot.

10 In the fourth embodiment, the exposure controller 126 provides the next actual pulse emission condition to the controller 101d of the excimer laser source 101 to determine the adjustment pulse emission condition of the excimer laser source 101. However, the adjustment pulse emission condition may be directly provided to the controller 101d of the excimer laser source 101 by the exposure controller 126. In this case, the input need not be performed when initiating the ready state of the excimer laser source 101.

25 At least one of the target energy (applied voltage), the oscillation frequency, the pause interval, the rotating speed of the fan in the laser resonator 101a, the temperature of the laser resonator 101a, and the gas pressure of the laser resonator 101a may be provided to the controller 101d of the excimer laser source 101 by the exposure controller 126 as the adjustment pulse emission

condition.

5 In the fourth embodiment, the high voltage power supply 101e adjusts the voltage supplied to the laser resonator 101a in accordance with the output DS of the integrator sensor 125 during scanning exposure. However, the voltage may be adjusted in accordance with the output ES of the energy monitor 101c in the excimer laser source 101.

10 In the fourth embodiment, the output DS of the integrator sensor 125 may be directly provided to the controller 101d of the excimer laser source 101 without being transmitted through the exposure controller 126.

15 The exposure apparatus of each of the above embodiments is manufactured by incorporating illumination and projection systems, which are formed from a plurality of lens, in a main body of an exposure apparatus and performing optical adjustment, securing reticle and wafer stages, which are
20 formed by a plurality of mechanical parts, connecting wires and pipes to the main body of the exposure apparatus, and performing entire adjustment (electrical adjustment, operation check, etc.). It is preferred that the manufacture of the exposure apparatus be performed in a
25 clean room in which the temperature and cleanness are managed.

30 Semiconductor devices are fabricated from wafers on which reticle patterns are transcribed by an exposure apparatus according to the present invention. That is, the semiconductor is fabricated by undergoing the steps of designing the function and capability of the device,

producing a reticle based on the designed function and,
exposing the reticle pattern on wafers with an exposure
apparatus according to the present invention, assembling
(dicing, bonding, and packaging) the device, and inspecting
the device.

Further, the present invention may be applied to a
full-field projection exposure apparatus, such as a stepper.

The laser apparatus according to the present invention
stably outputs the desired laser beam from the beginning of
the beam emission even if the emission condition of the
laser beam changes.

Further, the desired laser beam may stably be
irradiated against a substrate even if the usage condition
(emission condition) of the laser beam during exposure
changes. This unifies the cumulative exposure amount of
the substrate to the desired accuracy. The usage range
(energy range or frequency range) of the laser beam during
exposure may also be widened. This increases the range of
mask illumination conditions and substrate exposure
conditions.

It should be apparent to those skilled in the art that
the present invention may be embodied in many other specific
forms without departing from the spirit or scope of the
invention. Therefore, the present examples and embodiments
are to be considered as illustrative and not restrictive,
and the invention is not to be limited to the details given
herein, but may be modified within the scope and equivalence
of the appended claims.

WHAT IS CLAIMED IS:

1. A laser apparatus, comprising:
a laser element that emits a laser beam;
5 a detector that detects the laser beam emitted from the
laser beam body; and
a controller that controls the laser element to emit
the laser beam under a plurality of emission conditions in a
ready state, and controls the detector to detect the laser
10 beam emitted in the ready state.

2. The laser apparatus of claim 1, wherein the
emission conditions include an energy of the laser beam and
an emission period of the laser beam, and the emission
15 conditions in the ready state are changed by changing at
least one of the energy and the emission frequency.

3. The laser apparatus of claim 1, wherein the
controller determines control data for controlling an output
of the laser beam for each of the emission conditions based
20 on detection results of the detector in the ready state.

4. The laser apparatus of claim 3, wherein the laser
emits pulses of the laser beam, and the controller
25 determines the control data to control the output of the
laser beam for a predetermined number of pulses from when
emission is initiated.

5. The laser apparatus of claim 3, wherein the laser
beam is emitted by applying a predetermined voltage to the
laser element, and the controller adjusts the voltage
30 supplied to the laser element during a usage state, in which

the laser beam is emitted outside, based on the control data.

5 6. The laser apparatus of claim 3, further comprising a circulating device that circulates gas in the laser element, wherein the controller controls the circulating device during a usage state, in which the laser beam is emitted outside, based on the control data generated in the ready state.

10 7. The laser apparatus of claim 6, wherein the circulating device includes a fan for circulating the gas in the laser element, and the controller adjusts the rotating speed of the fan to adjust the circulation of the gas in the laser element.

15 8. The laser apparatus of claim 6, wherein the emission conditions include a circulating speed of the gas in the laser element, and the emission conditions are changed by changing the circulating speed.

20 9. The laser apparatus of claim 3, wherein the controller adjusts the pressure of gas in the laser element.

25 10. The laser apparatus of claim 9, wherein the emission conditions include a pressure of the gas in the laser element, and the emission conditions are changed by changing the pressure.

30 11. A method of controlling a laser apparatus that emits a laser beam, comprising the steps of:
 emitting a laser beam under a plurality of emission

conditions during a ready state in which the laser beam is not directed outside of the laser apparatus; and

detecting the emitted laser beam in the ready state.

5 12. An apparatus that exposes a substrate by illuminating a pattern formed on a mask with a laser beam and projecting an image of the pattern on the substrate, the apparatus comprising:

10 a laser source including a laser element to emit a laser beam;

15 an illumination unit disposed in a path of the laser beam, that guides the laser beam emitted from the laser source to the mask;

20 a detector, at least part of the detector being disposed in the path of the laser beam, that detects the laser beam emitted from the laser source; and

25 a controller functionally associated with the laser source and the detector, that controls the laser source to emit the laser beam under a plurality of emission conditions in a ready state and controls the detector to detect the laser beam emitted from the laser element in the ready state.

30 13. A method that exposes a substrate by illuminating a pattern formed on a mask with a laser beam and projecting an image of the pattern on the substrate, the method comprising the steps of:

 emitting the laser beam under a plurality of emission conditions during a ready state in which illumination of the mask with the laser beam is prevented;

 detecting the emitted laser beam in the ready state; and

adjusting the emission of the laser beam to be illuminated on the mask based on the detection result.

5 14. A laser apparatus that emits a laser beam to an external device, comprising:

a laser element that emits the laser beam; and
a laser controller that receives information from the external device and controls the emission of the laser beam from the laser element, wherein the controller determines an
10 emission condition of the laser beam during a ready state, in which the external device does not use the laser beam, based on the information.

15 15. The laser apparatus of claim 14, wherein the information includes an emission condition of the laser beam used in an operation which is performed by the external device after ready state.

20 16. The laser apparatus of claim 14, wherein the information includes an emission condition of the laser beam from the laser element in the ready state.

25 17. The laser apparatus of claim 14, wherein the information includes a target energy of the laser beam emitted from the laser element.

30 18. The laser apparatus of claim 14, wherein the laser element emits pulses of the laser beam with an emission frequency, and the information includes the emission frequency of the laser beam.

19. The laser apparatus of claim 14, wherein the

external device includes an exposure device that exposes a substrate by irradiating a mask with the laser beam emitted from the laser element and projecting a pattern image of the mask on the substrate.

5

20. The laser apparatus of claim 19, wherein the laser element emits pulses of the laser beam with an emission frequency, and the information includes at least one of a target energy of the laser beam and the emission frequency of the laser beam.

10

21. The laser apparatus of claim 19, wherein the information includes an emission condition of the laser beam used in an operational which is performed by the exposure device after the ready state.

15

22. The laser apparatus of claim 21, wherein the operation of the exposure device includes the exposure of the substrate.

20

23. An exposure apparatus that exposes a substrate by irradiating the substrate with a laser beam, comprising:

a laser apparatus including,

a laser element to emit the laser beam, and

25 a laser controller to control the emission of the laser beam;

a beam directing system disposed in a path of the laser beam that directs the laser beam emitted from the laser element to the substrate; and

30 an exposure controller connected to the laser controller that provides the laser controller information for determining an emission condition of the laser beam

during a ready state in which the laser beam emitted from the laser element is not guided outside of the laser apparatus.

5 24. The exposure apparatus of claim 23, wherein the information includes an emission condition of the laser beam from the laser element in the ready state.

10 25. The exposure apparatus of claim 23, wherein the information includes an emission condition of the laser beam when the laser beam is to be used, after the ready state, in an operational in which the laser beam is guided outside of the laser apparatus.

15 26. The exposure apparatus of claim 25, wherein the emission condition includes a conditions used in the operation for exposure of the substrate.

20 27. The exposure apparatus of claim 23, wherein the information includes a target energy of the laser beam to be output from the laser element.

25 28. The exposure apparatus of claim 23, wherein the laser element emits pulses of the laser beam with an emission frequency, and the information includes the emission frequency of the laser beam.

30 29. The exposure apparatus of claim 23, further comprising a detector for detecting the laser beam emitted from the laser element in the ready state, and wherein the laser controller prepares control data for use in an operation which is performed after the ready state based on

the emission condition of the laser beam used in the ready state and the detection result of the detector, the laser beam being directed outside of the laser apparatus in the operation.

5

30. A method for fabricating a device comprising the steps of:

providing an exposure apparatus, the apparatus including a laser apparatus which has a laser element to emit a laser beam and a laser controller to control the emission of the laser beam, a beam directing system that directs the laser beam emitted from the laser element to a substrate, and an exposure controller that provides the laser controller information for determining an emission condition of the laser beam during a ready state in which the laser beam emitted from the laser element is not guided outside of the laser apparatus; and

exposing the substrate by irradiating the substrate with the laser beam emitted from the laser element.

20

ABSTRACT OF THE INVENTION

A laser apparatus includes a laser element that emits the laser beam. A detector detects the laser beam emitted from the laser element. A controller controls the laser element such that the laser beam is oscillated subject to multiple conditions, such as the emission frequency and the energy of the laser beam, when the laser element is in a ready state, based on the detection results. In the ready state, the laser beam is not emitted from the apparatus onto a subject. Closely monitoring the oscillated beam in the ready state allows the precise beam desired to be emitted in an operational mode. The apparatus is useful for fabricating semiconductor devices.

Fig.2

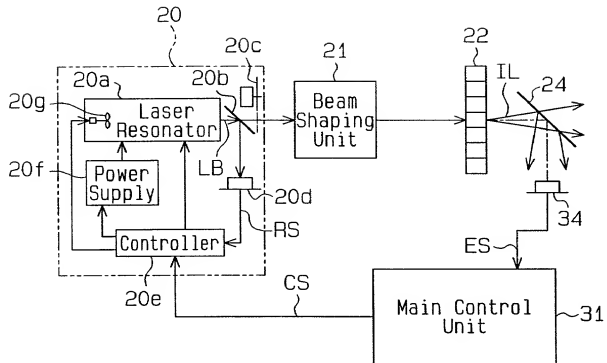


Fig.3




Fig.4


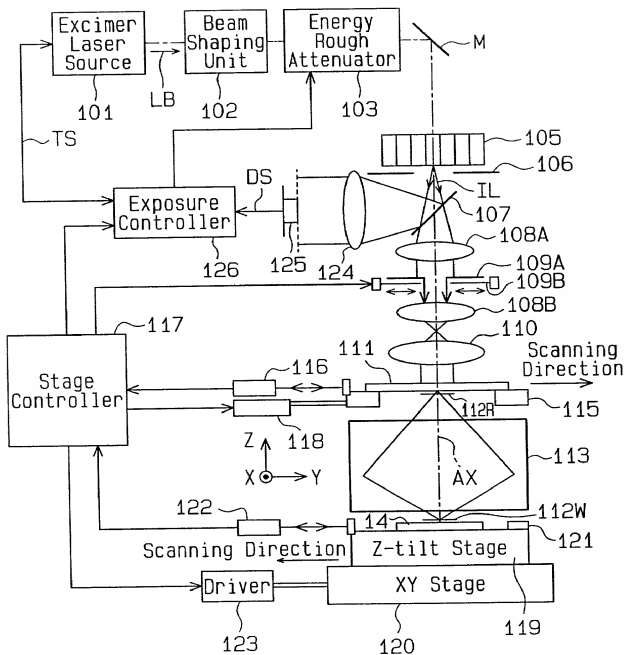


Fig.5

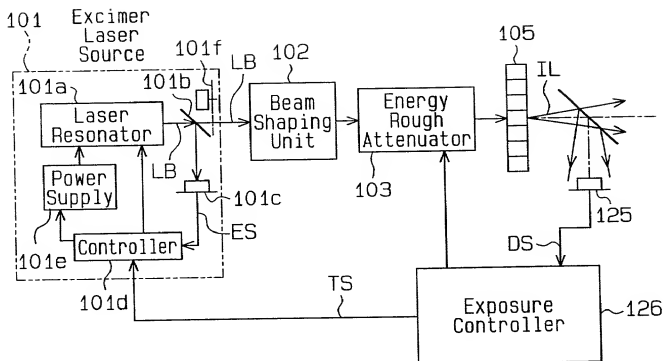

Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

私は、以下に記名された発明者として、ここに下記の通り宣言する：

As a below named inventor, I hereby declare that:

私の住所、郵便の宛先そして国籍は、私の氏名の後に記載された通りである。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明について、特許請求範囲に記載され、且つ特許が求められている発明主題に関して、私は、最初、最先且つ唯一の発明者である（唯一の氏名が記載されている場合）か、或いは最初、最先且つ共同発明者である（複数の氏名が記載されている場合）と信じている。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

LASER APPARATUS AND METHOD FOR

CONTROLLING THE SAME

上記発明の明細書はここに添付されているが、下記の欄がチェックされている場合は、この限りでない：

the specification of which is attached hereto unless the following box is checked:

☐ _____ の日に出版され、
この出版の米国出版番号または PCT 国際出版番号は、
_____ であり、且つ
_____ の日に補正された出版（該当する場合）

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、上記の補正書によって補正された、特許請求範囲を含む上記明細書を検討し、且つ内容を理解していることをここに表明する。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第 37 編規則 1.56 に定義されている、特許性について重要な情報を開示する義務があることを認める。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56

Japanese Language Declaration
(日本語宣言書)

私は、ここに、以下に記載した外国での特許出願または発明者証の出願、或いは米国以外の少なくとも一国を指定している米国法典第35編第365条(a)によるPCT国際出願について、同第119条(a)-(d)項又は第365条(b)項に基づいて優先権を主張するとともに、優先権を主張する本出願の出願日より前の出願日を有する外国での特許出願または発明者証の出願、或いはPCT国際出願については、いかなる出願も、下記の枠内をチェックすることにより示した。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application for which priority is claimed.

Prior Foreign Application(s)

外国での先行出願

Priority Not Claimed

優先権主張なし

Pat. Appln. No. 11-195850 Japan

(Number)

(Country)

(番号)

(国名)

09 / 07 / 1999

(Day/Month/Year Filed)

(出願日/月/年)

☐

Pat. Appln. No. 2000-142862 Japan

(Number)

(Country)

(番号)

(国名)

16 / 05 / 2000

(Day/Month/Year Filed)

(出願日/月/年)

☐

私は、ここに、下記のいかなる米国仮特許出願についても、その米国法典第35編119条(e)項の利益を主張する。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、ここに、下記のいかなる米国出願についても、その米国法典第35編第120条に基づく利益を主張し、又米国を指定するいかなるPCT国際出願についても、その同第365条(c)に基づく利益を主張する。また、本出願の各特許請求の範囲の主題が、米国法典第35編第112条第1段に規定された数値で、先行する米国出願又はPCT国際出願に開示されている場合においては、その先行出願の出願日と本国内出願日またはPCT国際出願日との間の期間中に入手された情報で、連邦規則法典第37編規則1.56に定義された特許性に関わる重要な情報について開示義務があることを承認する。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可、係属中、放棄)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可、係属中、放棄)

私は、ここに表明された私自身の知識に係わる陳述が真実であり、且つ信頼と信ずることに基づく陳述が、真実であると信じられることを宣言し、さらに、故意に虚偽の陳述などを行った場合は、米国法典第18編第1001条に基づき、罰金または拘禁、若しくはその両方により処罰され、またそのような故意による虚偽の陳述は、本出願またはそれに対して発行されるいかなる特許も、その有効性に問題が生ずることを理解した上で陳述が行われたことを、ここに宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration (日本語宣言書)

委任状: 私は本出願を審査する手続を行い、且つ米国特許商標庁との全ての業務を遂行するために、記名された発明者として、下記の弁理士及び/または弁理士を任命する。(氏名及び登録番号を記載すること)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

Gary A. Hecht (Reg. #36,826), Joseph F. Posillico (Reg #32,290), Mark D. Simpson (Reg. #32,942), Theodore Naccarella (Reg. #33,023), Charles H. Lindrooth (Reg #20,659), Alexis Barron (Reg #22,702), Peter J. Butch III (Reg #32,203), John A. Chionchio (Reg. #40,954), Gregory S. Bernabeo (Reg #44,032), Lisa B. Lane (Reg 38,217), Patrick J. Kelly (Reg #34,638), Stephen J. Driscoll (Reg #37,564), Stephen J. Weed (Reg #45,202), Ronald G. Ort (Reg. #26,969).

書類送付先

Send Correspondence to: Gary A. Hecht
Synnestvedt & Lechner LLP

1101 Market St.; Suite 2600

Philadelphia, PA 19107-2950

Direct Telephone Calls to: (name and telephone number)

Gary A. Hecht (215) 923-4466

直通電話連絡先: (氏名及び電話番号)

唯一または第一発明者氏名

Full name of sole or first inventor

Tsuyoshi TOKI

発明者の署名

日付

Inventor's signature

Date

Tsuyoshi Toki

03/07/2000

住所

Residence

2-7-12 Kichijyōji, Kitamachi,

Musashino-shi, Tokyo, JAPAN

国籍

Citizenship

Japan

郵便の宛先

Post Office Address

c/o NIKON CORPORATION,
Intellectual Property Headquarters

Fuji Bldg., 2-3, Marunouchi 3-chome,
Chiyoda-ku, Tokyo 100-8331 Japan

第二共同発明者がいる場合、その氏名

Full name of second joint inventor, if any

第二共同発明者の署名

日付

Second inventor's signature

Date

住所

Residence

国籍

Citizenship

郵便の宛先

Post Office Address

(第三以下の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)